




Uniclass L5214	EPIC E312
CI/SIB (47)	Ne5
20040434	SEPT 2011

Cornish Grey

A1, T1, S1 Roof Slate
75 year guarantee

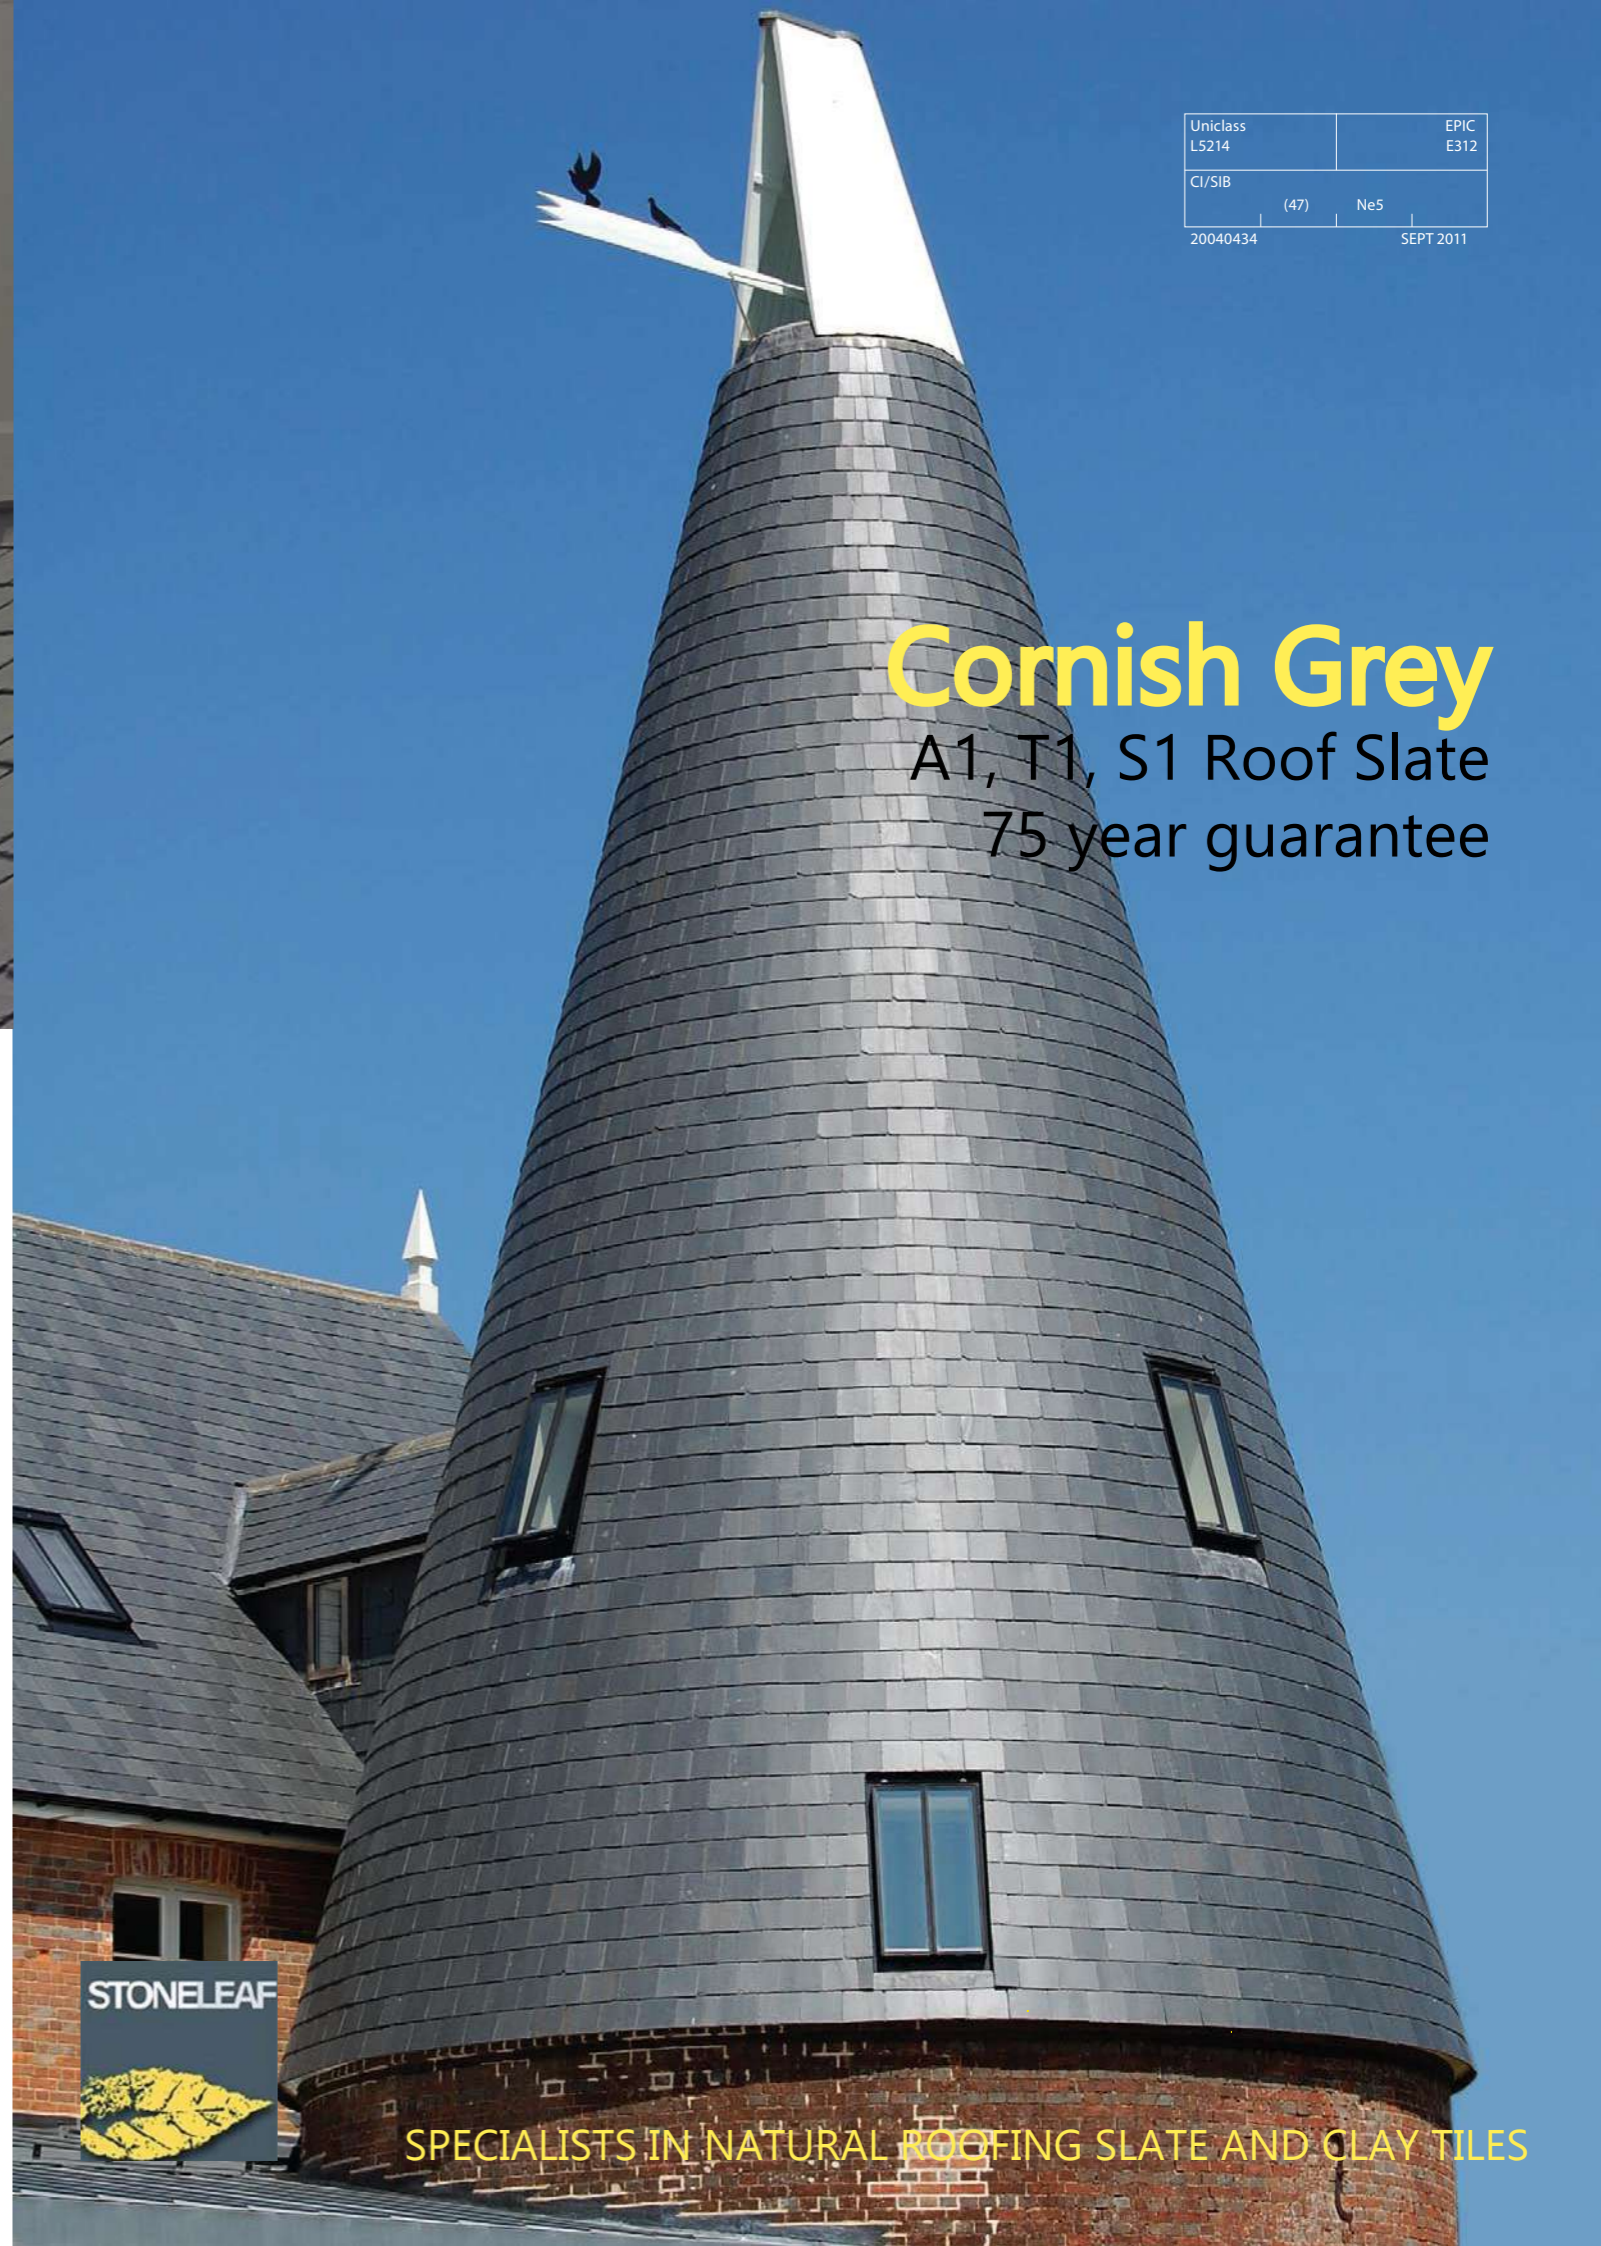

Source:	Spain
Approx Thickness:	7mm-8mm
Colour:	Grey
Texture:	Smooth
Sizes Available:	400 x 250mm, 500 x 250mm
Grades:	Heavy
Pre-Holing 400x250mm:	90mm lap
Coverage 400x250mm:	25.8 per M ² at 90mm lap
Pre-Holing 500x250mm:	75-100mm lap
Coverage 500x250mm:	18.82 per M ² at 75mm lap
Slate and a half:	Available un-holed
Strength:	Good flexural strength both transversely and longitudinally. A recommended 5% breakage allowance should be applied
Approx Weight:	49kg / M ² based on 500 x 250mm laid to 75mm lap

Guarantee: 75 year site specific guarantee available upon request

BS EN 12326-1:2014 Test Results:
Water Absorption A1, Thermal Cycle T1,
Sulphur Dioxide Exposure S1

Stoneleaf Building Materials
Unit 6 Temple Wood, West Hanningfield
Essex CM2 8LA
Tel: 01277 841 555
sales@stoneleafslates.co.uk
www.stoneleaftiles.co.uk



SPECIALISTS IN NATURAL ROOFING SLATE AND CLAY TILES



Stoneleaf Cornish Grey Natural Slate

The Stoneleaf Cornish Grey is a natural roof slate with a smooth textured surface, slightly rivened and light blue-grey in colour, formed from finely grained metamorphic rock.



STONELEAF
THE **NATURAL** CHOICE

Popular with specifiers, developers and home owners, the Stoneleaf Cornish Grey slate is of medium thickness, which when laid gives a roof finish with depth and character.

Stoneleaf Cornish Grey slates have been independently tested and meet all the requirements of the European Standard BS EN 12326-1:2014 including top ratings A1, T1, S1 for water absorption, Thermal Cycle and Sulphur Dioxide exposure, thereby making them suitable for use in all construction environments.

The Cornish Grey slate is a natural stone quarried from the earth which makes it completely sustainable. So for the environmentally conscious this is an ideal solution that will last a lifetime.